










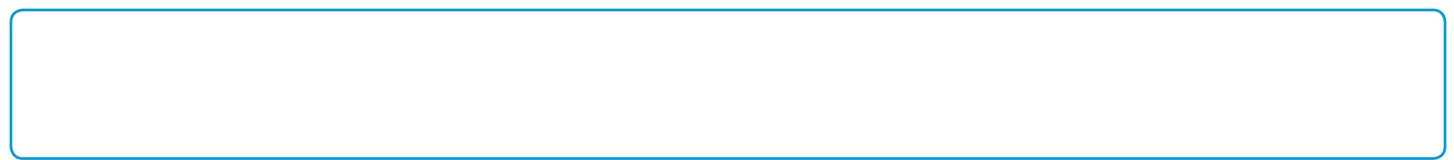




Rytons Order/Specification Code	Main Uses, Features and Benefits	Size	Free Area	Colours	Approvals & Testing
Code: CS351 	Rytons ClipStrip® Continuous soffit strip. Suits soffit boards up to and including 9mm thick. Fixing holes in high upstand for secure installation. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	2440mm L x 42mm W x 24mm H	25294mm ² per length 10366mm ² per metre Equal to continuous venting gap 10mm wide	WH, DB	 Irish Reg. Stat.
Code: CS702 	Rytons Low Pitch ClipStrip® Continuous soffit strip. Suits soffit boards up to and including 9mm thick. Fixing holes in high upstand for secure installation. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	2440mm L x 76mm W x 24mm H	61741mm ² per length 25303mm ² per metre Equal to continuous venting gap 25mm wide	WH, DB	 Irish Reg. Stat.
Code: CSG350 	Rytons Grooved Facia ClipStrip® Continuous soffit strip. 6mm upstand fits grooved facia board. Suits soffit boards up to and including 9mm thick. 4mm vent slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	2440mm L x 44mm W x 6mm H	25294mm ² per length 10366mm ² per metre Equal to continuous venting gap 10mm wide	WH, DB	 Irish Reg. Stat.
Code: SS240 	Rytons Ventilated Soffite Strip Continuous soffit strip. Suits any thickness of soffit board. Fixing holes in high upstand for secure installation. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	2440mm L x 44mm W x 24mm H	25294mm ² per length 10366mm ² per metre Equal to continuous venting gap 10mm wide	WH, DB	 Irish Reg. Stat.
Code: AS351 	Rytons Angled Soffite Strip Continuous soffit strip. Rubberised edge for angled soffit boards. Fixing holes for secure installation. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	2440mm L x 40mm W (inc. flexible strip)	25294mm ² per length 10366mm ² per metre Equal to continuous venting gap 10mm wide	WH, DB	 Irish Reg. Stat.
Code: PL235 	Rytons Push & Lock® Ventilator Round ventilator for new or existing soffit boards. Unique grips suit wood AND plastic soffit boards of any thickness. Maintains flush finish with soffit board. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RV600 on refurbishment projects. Use with Rytons RRV250 or TV600 on new build.	Internal Dia. 70mm External Dia. 83mm	2358mm ² per unit 10252mm ² per metre Equal to continuous venting gap 10mm wide at 230mm centres	WH, BR, BL, LO	 Irish Reg. Stat.
Code: ARBOR / HSAW 	Rytons Arbor Arbor with high-speed steel pilot drill. Rytons 70mm Diameter Hole Saw Bimetal hole saw with constant pitch. Drills a 70mm diameter hole. Drilled hole accommodates Rytons PL235.	Hex Shank: 11mm Chuck Size: 13mm 70mm Dia.	N/A Yellow	N/A N/A	

Colour Key





Rytons Order/Specification Code	Main Uses, Features and Benefits	Size	Free Area	Colours	Approvals & Testing
Code: OFV1000 	Rytons Over Facia Ventilator Over facia ventilator. Allows air into roof void. Fins prevent felt blocking the ventilation slots. Unseen when roof is completed. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	1000mm L x 44mm W x 20mm H	11235mm ² per length 11235mm ² per metre Equal to continuous venting gap 10mm wide	BL	 Irish Reg. Stat.
Code: OFV300 	Rytons Low Pitch Over Facia Ventilator Over facia ventilator. Allows air into roof void. Fins prevent felt blocking the ventilation slots. Unseen when roof is completed. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	297mm L x 59mm W x 45mm H	7500mm ² per length 25252mm ² per metre Equal to continuous venting gap 25mm wide	WH	 Irish Reg. Stat.
Code: OFV300 	Rytons Abutment Ventilator Flat roof abutment ventilator. Allows air into roof void. Fins prevent felt blocking the ventilation slots. Unseen when roof is completed. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	297mm L x 59mm W x 45mm H	7500mm ² per length 25252mm ² per metre Equal to continuous venting gap 25mm wide	WH	 Irish Reg. Stat.
Code: FR250 	Rytons Flat Roof/Abutment Ventilator Flat roof and abutment ventilator. Allows air into roof void. Fixing holes aid easy and accurate positioning on facia board. 4mm ventilation slots promote unrestricted air flow.	897mm L x 68mm W x 27mm H	22425mm ² per length 25000mm ² per metre Equal to continuous venting gap 25mm wide	BR	 Irish Reg. Stat.
Code: TS610 	Rytons 10mm T-Strip Roof ventilator for open eaves or exposed rafters. Forms a flyscreen barrier across the rafters. Sized for 600mm centres but easily cut to suit smaller rafter centres. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	610mm L x 24mm W x 47mm H	6645mm ² per length 11075mm ² per metre Equal to continuous venting gap 10mm wide	DB	 Irish Reg. Stat.
Code: TS625 	Rytons 25mm T-Strip Roof ventilator for open eaves or exposed rafters. Forms a flyscreen barrier across the rafters. Sized for 600mm centres but easily cut to suit smaller rafter centres. 4mm ventilation slots promote unrestricted air flow. Use with Rytons RRV250, TV600 or TV6005D.	610mm L x 24mm W x 63mm H	16554mm ² per length 27590mm ² per metre Equal to continuous venting gap 25mm wide	DB	 Irish Reg. Stat.
Code: RV600 	Rytons Refurbishment Ventilator Roof ventilator for refurbishment projects. One size suits all rafter spacings. Maintains the path of air into the roof void. Fitted from the inside.	280mm L x 225mm D (exc. flap) x 32mm H	7200mm ² per unit Equal to continuous venting gap 10mm wide	Clear	 Irish Reg. Stat.

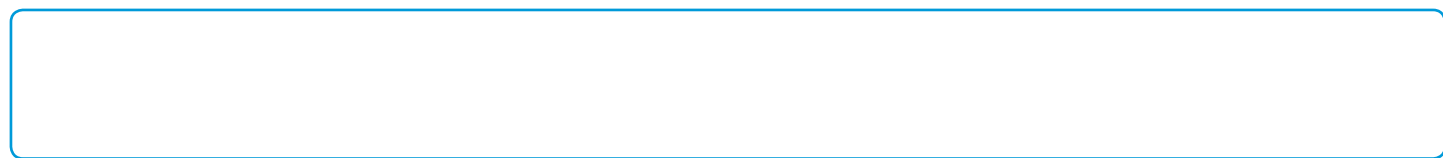

Rytons Order/Specification Code	Main Uses, Features and Benefits	Size	Free Area	Colours	Approvals & Testing
Code: RRV250 	Rytons Rafter Roll Ventilator Roll out roof ventilator. Maintains the path of air into the roof void. Suits any roof pitch or rafter spacing. Use with Rytons soffit strips, over fascia ventilators and 10mm or 25mm T-Strip.	4000mm L x 320mm D x 50mm H	10000mm ² per length 25000mm ² per metre Equal to continuous venting gap 10mm and 25mm wide	BL	 BBA BRITISH BOARD OF AGREEMENT CERTIFICATE No. 94/3070 Irish Reg. Stat.
Code: TV600 	Rytons Roof Ventilator for 600mm rafter centres Roof ventilator. Maintains the path of air into the roof void. Overlapping flanges ensure secure fixing. Use with Rytons soffit strips, over fascia ventilators and 10mm or 25mm T-Strip.	620mm L x 250mm D x 45mm H	19000mm ² per unit 31666mm ² per metre Equal to continuous venting gap 10mm and 25mm wide	BL	 BBA BRITISH BOARD OF AGREEMENT CERTIFICATE No. 94/3070 Irish Reg. Stat.
Code: TV6005D 	Rytons Deep Roof Ventilator for 600mm rafter centres Roof ventilator. Double depth to hold thicker insulation. Maintains the path of air into the roof void. Overlapping flanges ensure secure fixing. Use with Rytons soffit strips, over fascia ventilators and 10mm or 25mm T-Strip.	620mm L x 500mm D x 45mm H	19000mm ² per unit 31666mm ² per metre Equal to continuous venting gap 10mm and 25mm wide	BL	 BBA BRITISH BOARD OF AGREEMENT CERTIFICATE No. 94/3070 Irish Reg. Stat.
Code: TV600F 	Rytons Flyscreened Roof Ventilator for 600mm rafter centres Roof ventilator for open eaves or exposed rafters. Maintains the path of air into the roof void. Overlapping flanges ensure secure fixing. 4mm ventilation slots promote unrestricted air flow.	620mm L x 250mm D x 45mm H	6000mm ² per unit 10000mm ² per metre Equal to continuous venting gap 10mm wide	BL	 BBA BRITISH BOARD OF AGREEMENT CERTIFICATE No. 94/3070 Irish Reg. Stat.
Code: TV600F5D 	Rytons Deep Flyscreened Roof Ventilator for 600mm rafter centres Roof ventilator for open eaves or exposed rafters. Double depth to hold thicker insulation. Maintains the path of air into the roof void. Overlapping flanges ensure secure fixing. 4mm ventilation slots promote unrestricted air flow.	620mm L x 500mm D x 45mm H	6000mm ² per unit 10000mm ² per metre Equal to continuous venting gap 10mm wide	BL	 BBA BRITISH BOARD OF AGREEMENT CERTIFICATE No. 94/3070 Irish Reg. Stat.
Code: EG920 	Rytons EavesGuard® Felt support and felt replacement system. U.V. stabilised against deterioration by sunlight. Eliminates roof felt sagging at rear of fascia. Eliminates felt rot at gutter level. Compatible with Rytons over fascia vents and RytComb.	920mm L x 307mm D	Not applicable	BL	 U.V. stabilised
Code: RYTComb 	Rytons RytComb Stops birds, large insects and vermin to roof. Suitable for pantiles in new or refurb work. Unique tapered combs assist flush fitting. Compatible with Rytons over fascia ventilators and EG920.	1000mm L x 18mm D (fixing strip) x 54mm H	Not applicable	BL	 BBA BRITISH BOARD OF AGREEMENT CERTIFICATE No. 94/3070 Irish Reg. Stat.