



CAST-IN & FACE FIX CHANNEL SYSTEM

These products both allow vertical movement whilst offering horizontal restraint. The channel system tends to be face-fixed, whilst the slot is usually cast into concrete. These systems may be used to overcome differences in coursing between masonry leaves.

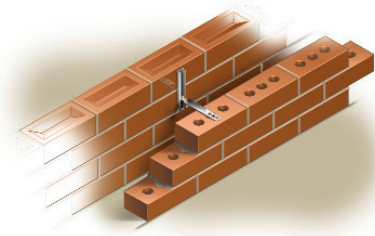

Type	Length	Code
V60	75MM	V60-75
	100MM	V60-100
	150MM	V60-150
	3000MM	V60-3000




A channel and tie system designed for face fixing, either by bolting, plugging and screwing, or with the addition of welded tangs by building in.

Type	Length	Code
V29	75MM	V29-75
	100MM	V29-100
	150MM	V29-150
	3000MM	V29-3000





Cast in dovetail slot, available in stainless or pre-galvanised material, pre-filled with polystyrene (to prevent concrete ingress) Standard lengths of 75mm,100mm,150mm & 3000mm. Ties to suit with safety ends: welded (V98) or solid(VS8). (welded ties in stainless only.)

Type	Length	Code
VS8	75MM	VS8-75
	100MM	VS8-100
	125MM	VS8-125
	150MM	VS8-150
	175MM	VS8-175
	200MM	VS8-200
	225MM	VS8-225
	250MM	VS8-250



Dove tail ties for channel. VS8D specifies drip to your requirement.

Type	Length	Code
V98	100MM	V98-100
	125MM	V98-125
	150MM	V98-150
	175MM	V98-175
	200MM	V98-200
	225MM	V98-225
	250MM	V98-250
	275MM	V98-275
	300MM	V98-300

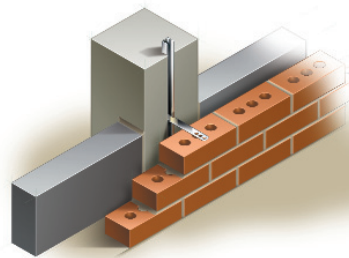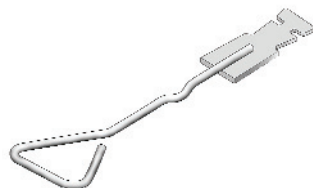

Safety ended dove-tail channel ties.